




Packaging Industry

SPEEDFORMER KMD 64 Power



The KMD 64 Power is a winner, which guarantees success both for beginners and users switching from other systems.

The pressure forming machine impresses – whether processing (R)PET, PP, PS, CPET, OPS, PLA, PE and others in forming parts – with the core values: Robust. Dynamic. Powerful.

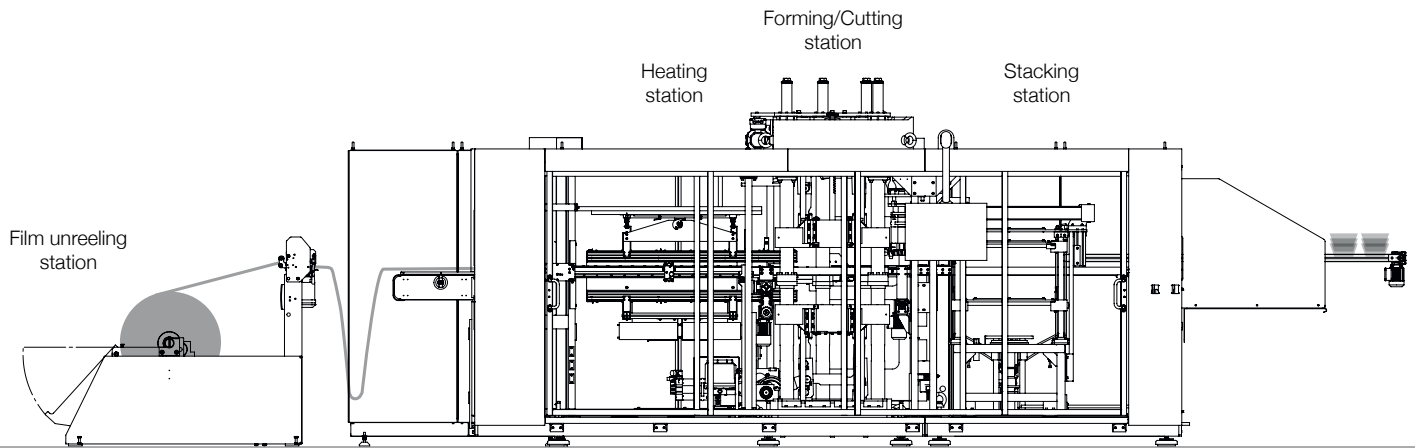


Automatic Pressure
Forming Machine
KMD 64 Power



RDK toolsets fit without requiring adaption of any kind



Heating with efficient ceramic elements (HTS)

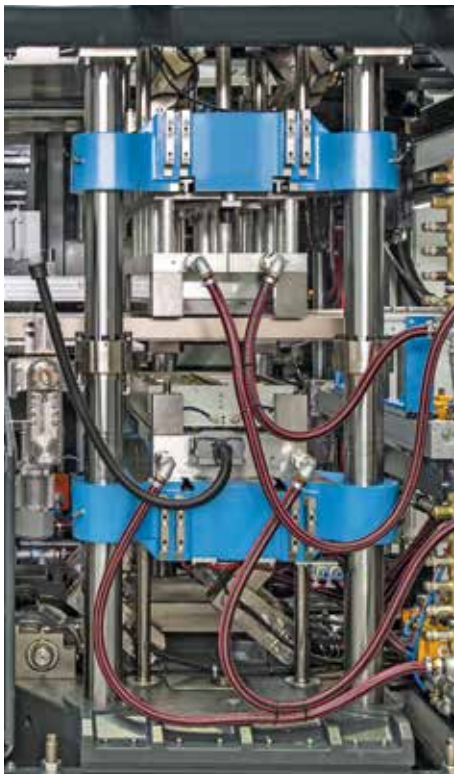

RDK toolsets fit without requiring adaption of any kind

- Pyrometer to measure and ensure stable film temperature via closed loop auto-heat performance adjustment
- Forming and Cutting Station in solid steel cast structure with needle bearings for toggles
- No compromise on Kiefel „KISS CUT“ by use of tension bars in forming station when cut-in-place (BFS)
- Stacking station design as up-stacker available
- Thanks to the Kiefel CAT-system trouble free start-up of new tools and creation of tailor-made recipes

Technical Data

KMD 64 Power

Maximum forming area	595 x 480 mm
Minimum forming area	250 x 230 mm
Maximum tool dimensions	615 x 500 mm
Maximum tool weight per table	300 kg
Maximum height of formed part above film level	120 mm
Maximum height of formed part below film level	120 mm
Maximum film width	670 mm
Maximum production speed / BFS-mode	50 cycles/min. / 45 cycles/min.